



Heyco® Modular Connector System - Power Cords and Jumpers


UL Listed for Use in the U.S. under File E217650




DESCRIPTION	WIRE			Length L * in.	PART NO.
	Volts-Amps	Type	Gauge AWG-Cond		
NEMA 5-15P Detachable Power Cord for Special Modular Applications - 120 Volts, 7 Amps with Special Connector					
120V-7A	SPT-2	18-3	White	72.0	S7501-72
				108.0	S7501-108 NEW!
Detachable Jumper Cords for Special Modular Applications					
120V-7A	SPT-2	18-3	White	6.0	S7506-06
				12.0	S7506-12
				24.0	S7506-24 NEW!
				30.0	S7506-30 NEW!
				36.0	S7506-36 NEW!
				48.0	S7506-48 NEW!
72.0	S7506-72				

- End-to-end connection as in covers or under cabinets.
- End-to-side connection to make 90 degree turns.
- Available with daisy chaining capabilities with 18/3, SPT-2 Wire. Consult Heyco for additional lengths not shown.
- Available with plug-in power cord capabilities with 18/3, SPT-2 power cord.
- Interconnects help keep down high labor installation costs when more than one fixture is involved.

* Consult Heyco for any required length not shown.

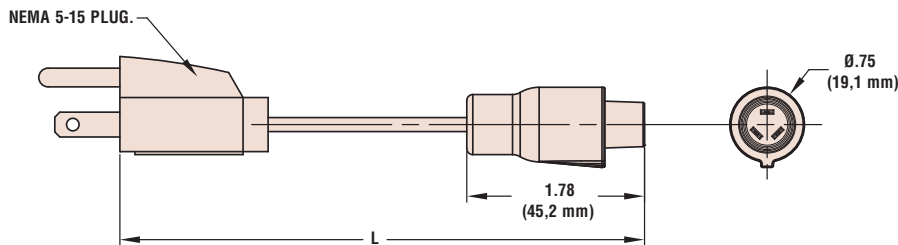

S7501-72 Power Cord

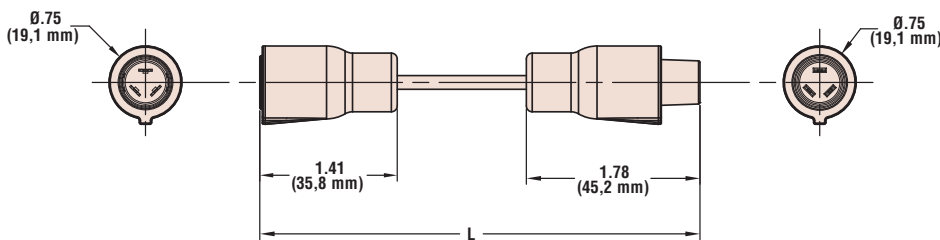

S7506 Jumper

Materials	PVC and Alloy 260 Brass
Certifications	UL Listed under Underwriters' Laboratories File E217650
Flammability Rating	94HB

Quick Specs