




## HEYClip™ SunRunner 4™ Cable Clip

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (4) Wires	PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum	Maximum						A x B		C	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	
Double-Compression Design for panels up to .250" (6,4 mm) thick										
.13	3,2	.25	6,4	.20" (5,1 mm)- .30" (7,6 mm) each cable	S6400	SunRunner 4™ 100 Pack	1.34 x .50	34,0 x 12,7	.36	9,1
					S6440	SunRunner 4™ Bulk				

- Designed to hold up to (4) 12 gauge USE-2 or (4) 10 gauge PV-1000V solar wires.
- Also for use with other types of cables from .20" (5,1 mm) to .30" (7,6 mm) in diameter.
- Designed to provide a better method for PV module wire management and may be used whenever multiple cable management is needed.
- Smooth clip edges prevent damage to cable insulation.
- SunRunner 4 Cable Clip is designed to accommodate thicker racking systems up to .250" (6,4 mm) thick.
- Constructed from heat treated 410 stainless steel for excellent strength and corrosion protection for outdoor exposure.
- Not for use in a marine salt water environment. Contact Heyco for alternative materials.
- DFARS Compliant

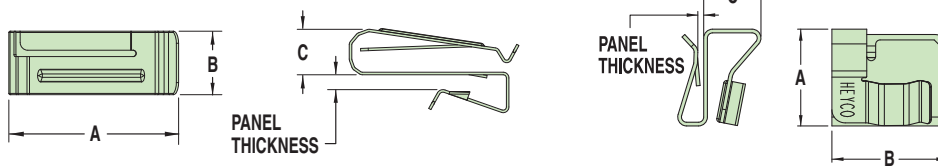

SunRunner® 4™

SunRunner® 90°

## HEYClip™ SunRunner® 90° Cable Clip

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (1) Wire	PART NO.	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum	Maximum						A x B		C	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	
Double-Compression, Right Angle Design										
.06	1,4	.13	3,2	.20" (5,1 mm)- .30" (7,6 mm) each cable	S6406	SunRunner 90° 100 Pack	.65 x .78	16,5 x 19,8	.39	9,9
					S6446	SunRunner 90° Bulk				



- SunRunner 90° Cable Clip is designed to mount at a 90° angle to the original SunRunner. The SunRunner 90° will accommodate a single cable from .20" (5,1 mm) to .30" (7,6 mm).
- SunRunner 90° is designed for use with PV modules mounted in the “landscape” mode. PV modules with shorter than normal junction box cables cannot be dressed out to the sides of the module. The SunRunner 90° will allow the junction box cables to be run to the adjacent modules across the short side of the PV module frame.
- Not for use in a marine salt water environment. Contact Heyco for alternative materials.
- DFARS Compliant

Material SunRunner 4 – .020" thick heat treated 410 stainless steel  
SunRunner 90° – .025" thick 304 stainless steel

Certifications Certified by UL for Compliance with both Canadian and US Requirements under File E54523 (SunRunner 90 only)