




Heyco® Stainless Steel Cable Ties

Ball Lock Stainless Steel Strip Cable Ties - AISI 304*
- Standard and PVC Coated



PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Min. Tensile Strength		Max. Bundle Diameter		Standard Steel	PVC Coated Black		A Length		B Width	
Lbs.	N	in.	mm.			in.	mm.	in.	mm.	
112	500	1.18	30,0	12801	12801B	NTSS-0150-46A	5.91	150	.18	4,6
		2.05	52,0	12802	12802B	NTSS-0200-46A	7.87	200		
		2.68	68,0	12803	12803B	NTSS-0250-46A	9.84	250		
		3.23	82,0	12805	12805B	NTSS-0300-46A	11.81	300		
		3.86	98,0	12806	12806B	NTSS-0350-46A	13.78	350		
		4.33	110,0	12808	12808B	NTSS-0400-46A	15.75	400		
		5.75	146,0	12810	12810B	NTSS-0500-46A	19.69	500		
		7.09	180,0	12812	12812B	NTSS-0600-46A	23.62	600		
		9.50	240,0	12814	12814B	NTSS-0800-46A	31.50	800		
250	1115	2.05	52,0	12821	12821B	NTSS-0200-79A	7.87	200	.31	7,9
		2.68	68,0	12822	12822B	NTSS-0250-79A	9.84	250		
		3.23	82,0	12824	12824B	NTSS-0300-79A	11.81	300		
		3.86	98,0	12825	12825B	NTSS-0350-79A	13.78	350		
		4.33	110,0	12827	12827B	NTSS-0400-79A	15.75	400		
		5.75	146,0	12829	12829B	NTSS-0500-79A	19.69	500		
		7.09	180,0	12831	12831B	NTSS-0600-79A	23.62	600		
		8.27	210,0	12833	12833B	NTSS-0700-79A	27.56	700		
		9.50	240,0	12834	12834B	NTSS-0800-79A	31.50	800		
		12.09	307,0	12836	12836B	NTSS-1000-79A	39.37	1000		

* AISI 316 available, consult Heyco.

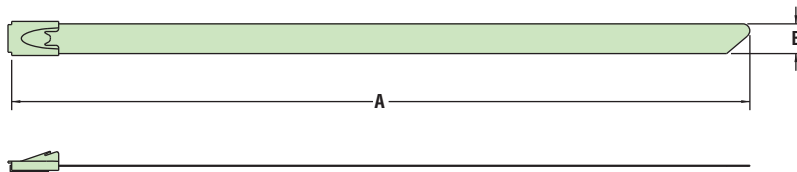

- For ease of assembly, position locking head so that the widest end is down.
- Part Description Key: NTSS-XXXX-YYA where XXXX = length (mm) and YYA = width (mm) with A indicating AISI 304 stainless steel.
- Stainless steel cable ties have more strength and better durability than nylon cable ties.
- Locking ball design for maximum holding strength and ease of installation.
- Coated ties offer additional protection and separation of dissimilar metals for improved corrosion resistance.
- Suitable for harsh outdoor environments; conform to standard IEC92 for Marine Electrical Appliances and the requirements of CB1113-85 “Plastic Covered Metal Cable Ties”, “Steel Sea Boats Construction Level Standard.”
- Secure bundles in moist and high temperature environments with decay, fire, corrosion, and radio resistance.
- Widely used in shipping, communication, and flight applications.
- .010" (0,25 mm) thick.
- Custom lengths available.
- 100 pack standard.

Materials

Lcr18Ni9 with PVC coating. AISI 304 stainless steel

Quick Specs