



RoHS



FEATURES

- Universal 85 - 264VAC or 120 - 373VDC Input voltage
- Operating ambient temperature range: -30℃ to +70℃
- High efficiency, high reliability and long lifetime
- LED indicator for power on
- Output short circuit, over-current, over-voltage protection
- Withstand 300VAC surge input for 5s
- High I/O isolation test voltage up to 3000VAC
- Safety according to IEC/EN/UL62368, EN60335, GB4943
- Emissions compliant to CISPR32/EN55032 CLASS B
- Withstand 5G vibration test
- Operating altitude up to 5000m

This LM35-10Dxx series of power converter design features dual output versions, which can independently supply 2 different loads in the system. The products can be used in harsh working environments with an ambient temperature range from -30℃ to +70℃, without the need of a fan for further heat dissipation. In addition, the converters EMC immunity performance meets the requirements of IEC61000 standard and meet emission standard CISPR32/EN55032, class B without any external components, thus providing excellent EMC protection. The products also meet IEC/EN/UL62368/EN60335/GB4943 safety standards. The converters integrate a variety of protection features and offer a high-performance and high cost-effective providing the best power solution for a variety of industries such as industrial control equipment, instrumentation and smart home and building equipment application.

Selection Guide

Certification*	Part No.	Output Power	Nominal Output Voltage and Current		Working Current Range*		Efficiency* (%) Typ.	Max. Capacitive Load (μF)	
			Vo1/Io1	Vo2/Io2	Io1	Io2		Vo1	Vo2
UL/CE	LM35-10D0512-10	32W	+5V/4.0A	+12V/1.0A	0.4-5.0A	0.1-1.5A	81	4000	1000
	LM35-10D0524-10	35W	+5V/2.2A	+24V/1.0A	0.22-4.0A	0.1-1.3A	83	2200	1000

Note: 1.*Working current range: If any one of the 3 outputs arrive at the maximum current, the total output power cannot exceed the rated power and working time < 3s.
 2.*The typical efficiency tested under input voltage at 230VAC.
 3.*Use suffix "Q" for conformal coating.
 4.*The customer has UL certification requirements, please consult Mornsun FAE.

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	264	VAC
	DC input		120	--	373	VDC
Input Frequency			47	--	63	Hz
Input Current	115VAC		--	--	0.75	A
	230VAC		--	--	0.5	
Inrush Current	115VAC	Cold start	--	30	--	
	230VAC		--	50	--	
Leakage Current	240VAC		<2.0mA			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions			Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	Vo1		--	±2.0	--	%
		Vo2	LM35-10D0512-10	--	±8.0	--	
			LM35-10D0524-10	-4.0	--	+8.0	
Line Regulation	Full load	Vo1		--	±0.5	--	
		Vo2	LM35-10D0512-10	--	±1.5	--	
			LM35-10D0524-10	--	±1.5	--	
Load Regulation	10% - 100% load	Vo1		--	±0.5	--	





AC/DC 35W Enclosed Switching Power Supply

LM35-10Dxx, LM35-10Dxx-Q Series

MORNSUN®

	(Balanced load)	Vo2	LM35-10D0512-10	--	±5.0	--	
			LM35-10D0524-10	--	±5.0	--	
Ripple & Noise*	20MHz bandwidth (peak-peak value)	Vo1		--	80	--	mV
		Vo2	LM35-10D0512-10	--	150	--	
			LM35-10D0524-10	--	150	--	
Temperature Coefficient				--	±0.03	--	%/℃
Voltage Adjustable Range (Vo1) *	Rated input voltage			4.75	--	5.50	VDC
Start-up Delay Time	Rated input voltage			--	--	2.0	s
Output Voltage Rise Time	The output Vo1/Vo2 rise time from 10%Vo to 90%Vo at rated voltage 115V/60Hz & 230V/50Hz, rated output load, ambient temperature			--	--	30	mS
Hold-up Time	115VAC			--	5	--	
	230VAC			--	30	--	
Minimum Load				Refer to the working current range			
Short Circuit Protection	Recovery time <5s after the short circuit disappear			Hiccup, continuous, self-recovery			
Over-current Protection	2 outputs with equal-scale load			110% - 220%Io, self-recovery			
Over-voltage Protection				5.75VDC ≤Vo1≤6.75VDC, output clamped			
Note: 1.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 104 ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information. 2.*When Vo1 working in the adjustable range, the output power please refer to power derating curve and should not be exceed the rated output power.							

General Specifications

Item		Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Voltage	Output - Output	Electric Strength Test for 1min, leakage current <10mA		500	--	--	VDC
	Input - Output			3000	--	--	VAC
	Input - 			2000	--	--	
	Output - 			500	--	--	
Insulation Resistance	Input - Output	At 500VDC		100	--	--	MΩ
	Input - 			100	--	--	
	Output - 			100	--	--	
Operating Temperature		Refer to derating curve		-30	--	+70	℃
Storage Temperature				-40	--	+85	
Storage Humidity		Non-condensing		10	--	95	%RH
Power Derating	Input voltage derating	85VAC - 115VAC	0.667	--	--	%VAC	
		115VAC - 264VAC	0	--	--		
		120VDC - 160VDC	0.5	--	--	%VDC	
		160VDC - 373VDC	0	--	--		
	Operating temperature derating	+50℃ to +70℃	2.5	--	--	%/℃	
Safety Standard				Meet IEC/EN/UL62368/EN60335/GB4943			
Safety Class				CLASS I			
MTBF		MIL-HDBK-217F@25℃		>300,000 h			

Physical Specifications

Case Material	Metal (AL1100, SGCC)
Dimension	99.00 x 97.00 x 30.00 mm
Weight	210g (Typ.)
Cooling Method	Free air convection

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2020.01.15-A/3



Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

EMC Specifications



Emissions	CE	CISPR32/EN55032 CLASS B		
	RE	CISPR32/EN55032 CLASS B		
	Harmonic current	IEC/EN61000-3-2 CLASS A		
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV /Air ±8KV	Perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV	perf. Criteria A
	Surge	IEC/EN 61000-4-5	Line to Line ±2KV/Line to Ground±4KV	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%,70%	perf. Criteria B

Product Characteristic Curve

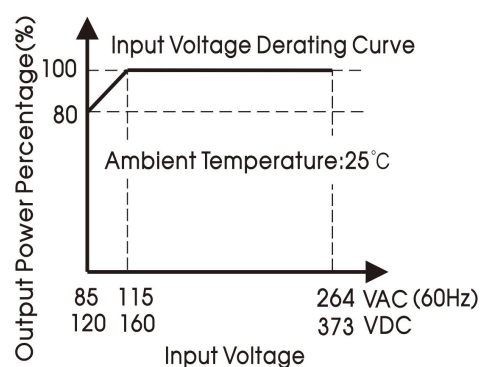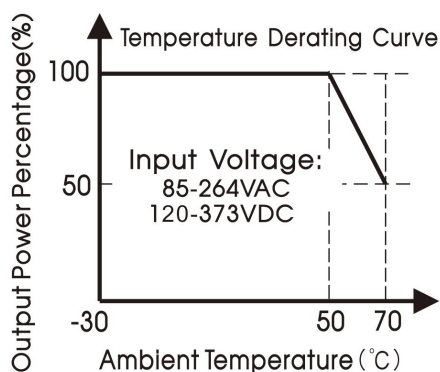

Note: ① With an input voltage between 85 - 115VAC and a DC input between 120 - 160VDC the output power must be derated as per the temperature derating curves;

② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

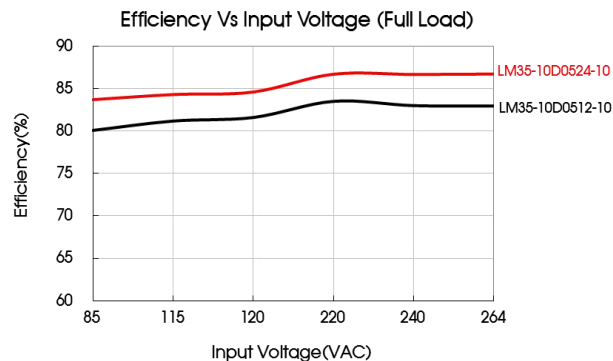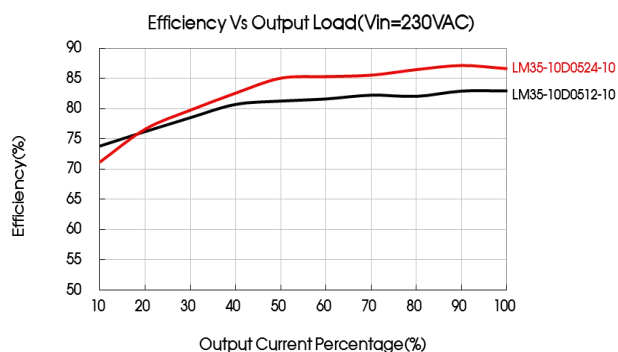


AC/DC 35W Enclosed Switching Power Supply

LM35-10Dxx, LM35-10Dxx-Q Series

MORNSUN®


Dimensions and Recommended Layout

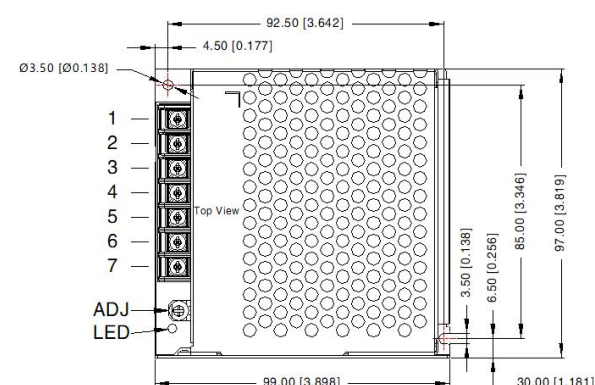



THIRD ANGLE PROJECTION



Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⏏
4	-Vo2
5	+Vo2
6	-Vo1
7	+Vo1

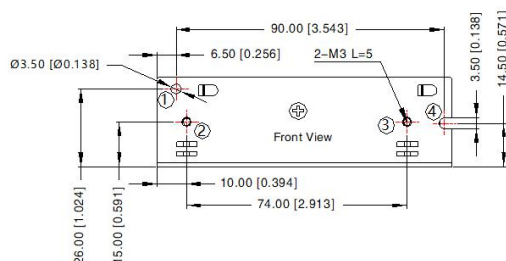

Position	Screw Spec.	L(max)	Torque(max)
② ③	M3	5mm	0.4N·m
⑥ ⑦	M3	3mm	0.4N·m

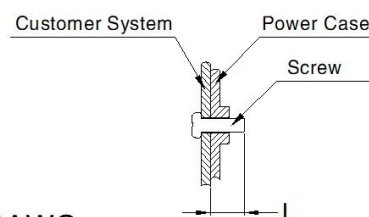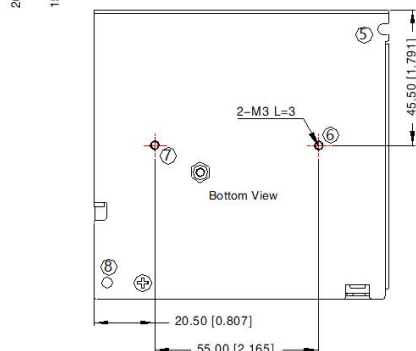

Note:

Unit: mm[inch]

Wire range: 22-14AWG

Tightening torque: M3, 0.5N·m

General tolerances: $\pm 1.00 [\pm 0.039]$

①-⑧ any position must be connected to PE

Note:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58220066;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
- The ambient temperature derating of $5^\circ\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE(⏏) of system when the terminal equipment in operating;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.
- The power supply is considered a component which will be installed into a final equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China
 Ttel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2020.01.15-A/3

Page 4 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation