
## Heyco® Edge Clip

Molded One-Piece with 6" Cable Tie

| <b>CABLE TIE SPECIFICATIONS</b>                      | PART         | DESCRIPTION | PART DIMENSIONS          |            |         |           |     |                |               |     |
|--|--------------|-------------|--------------------------|------------|---------|-----------|-----|----------------|---------------|-----|
| Tensile Max. Bundle Strength Diameter                | No.<br>Black |             | Cable Tie<br>Orientation | A<br>Lenat | th W    | B<br>idth |     | Panel<br>kness | Max.<br>Thick |     |
| Lbs.   N   in.   mm.                                 |              |             |                          |            |         | mm.       |     | mm.            | in.           | mm. |
| For Panels from .04" (1,0 mm) to .12" (3,0 mm) Thick |              |             |                          |            |         |           |     |                |               |     |
| 50   222   1.57   40,0                               | 15214        | EC13SMPEUA6 | Perpendicular            | 6.3 16     | 0,0 .19 | 4,8       | .04 | 1,0            | .12           | 3,0 |



- Steel clip provides high panel retention forces, while requiring low insertion force.
- Plastic housing ensures easy, ergonomic installation.
- Ideal solution for applications where holes are not available or temperatures are too extreme for adhesive solutions.
- Parallel orientation means the cable tie is parallel to the fixing edge.
- Perpendicular orientation means the cable tie is perpendicular to the fixing edge.

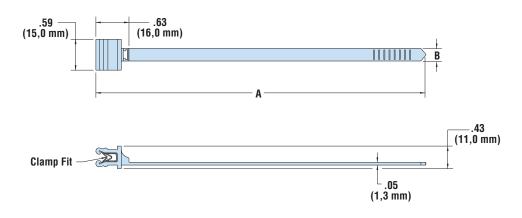

Material Nylon 6/6 UV Resistant and Heat Stabilized

Flammability Rating 94V-

Temperature Range -.04°F (-18°C) to 221°F (105°C)

Quick Specs