

“Stay Connected” with




HEYware Products

a PennEngineering® Company



## Heyco® Blind-Mount Cable Clamp


BUNDLE DIAMETER RANGE		PANEL THICKNESS RANGE		PART NO.	DESCRIPTION	PART DIMENSIONS			MOUNTING HOLE DIAMETER RANGE							
Min.	Max.	Min.	Max.			Overall Height (closed)	Width	Length								
in.	mm.	in.	mm.													
.39	10,0	.55	14,0	.02	0,6	.32	8,3	<b>16750</b>	BMCC 250-550	1.61	40,9	.47	11,9	1.10	27,9	.24 (6,1 mm) to .27 (6,9 mm)

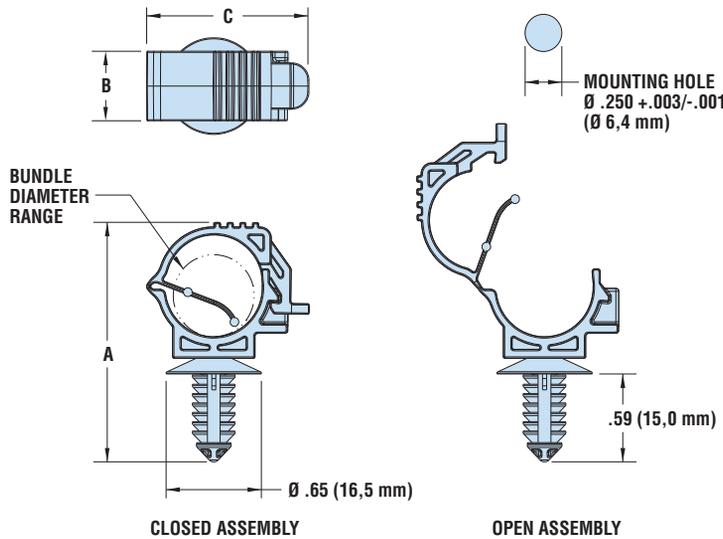

- Releasable and reusable.
- Blind mount does not require through-hole; panel back-side access.
- Cupped design provides some splash protection.
- Flexible arm holds cables/bundle with slight axial retention.
- Mount clamp prior to installation – install cable later with easy fold-over closure.

## Heyco® Edge Clip Side-Mount Perpendicular Clamp

PART NO.	DESCRIPTION
14250	EC 13 SMPE-550

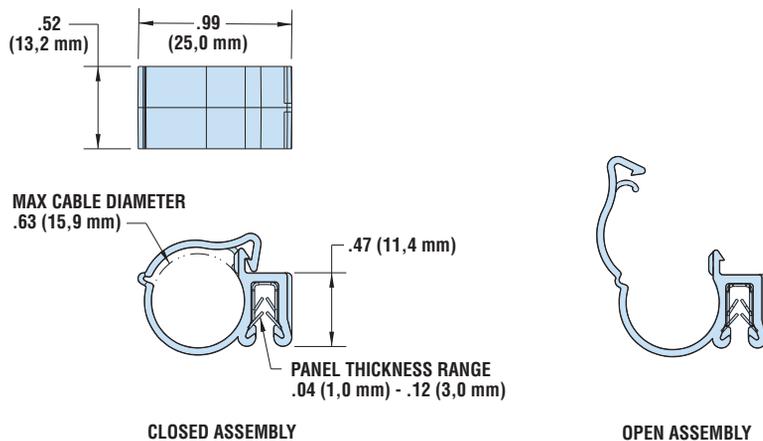

- No mounting hole required.
- Strong mounting hold with steel clip.
- Mount clamp prior to installation – install cable later with easy fold-over closure.



Material	<b>Clamps</b> – Heat Stabilized Nylon 6/6, Black <b>Clip</b> – Plated Spring Steel (14250)
Temperature Range	32°F (0°C) to 221°F (105°C)

Quick  
Specs