

"Stay Connected" with



Liquid Tight Conduit, Tubing & Fittings



a PennEngineering® Company



Heyco® PVC Corrugated Conduit – Electrical Non-Metallic Tubing (ENT)

- Durable, nonconductive and rigid PVC construction
- Phthalate free
- Compatible with any UL approved fittings
- Suitable for encasement in concrete or in walls and ceiling (per NEC code)

METRIC DESIGNATION (TRADE SIZE)	PART NO. Gray PVC	DESCRIPTION	PART DIMENSIONS										Roll Length	
			A				B							
			Inside Diameter		Max		Outside Diameter		Max					
			in.	mm.	in.	mm.	in.	mm.	in.	mm.	Ft.	M.		
16 (1/2)	8289	HF7 1/2 200´ COIL GRAY	.57	14,6	.63	16,0	.83	21,1	.85	21,5	200	61		
21 (3/4)	8290	HF7 3/4 100´ COIL GRAY	.78	19,7	.83	21,1	1.04	26,4	1.06	26,9	100	31		
27 (1)	8291	HF7 1 100´ COIL GRAY	1.00	25,4	1.06	26,9	1.31	33,2	1.33	33,7	100	31		
35 (1-1/4)	8292	HF7 1-1/4 750´ REEL GRAY	1.33	33,7	1.39	35,4	1.65	41,9	1.67	42,5	750	229		
41 (1-1/2)	8293	HF7 1-1/2 750´ REEL GRAY	1.56	39,6	1.62	41,2	1.89	48,0	1.91	48,6	750	229		
53 (2)	8294	HF7 2 500´ REEL GRAY	2.02	51,2	2.08	52,8	2.36	60,0	2.39	60,6	500	152		

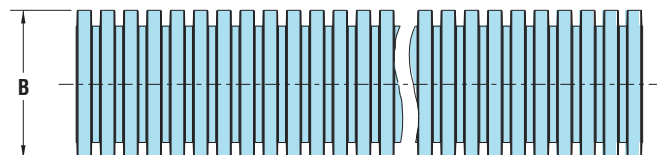

*Quick
Specs*

Material
Certifications



PVC
Listed under Underwriters' Laboratories File E530821
FT4 Rated

Temperature Range

-4°F (-20°C) - 122°F (50°C)