
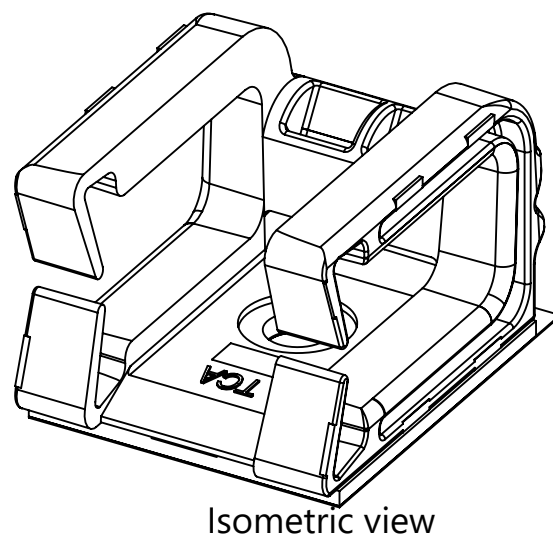
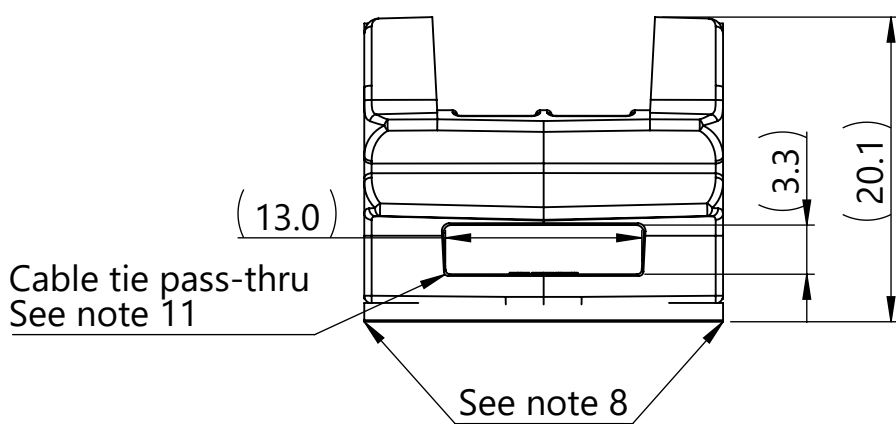
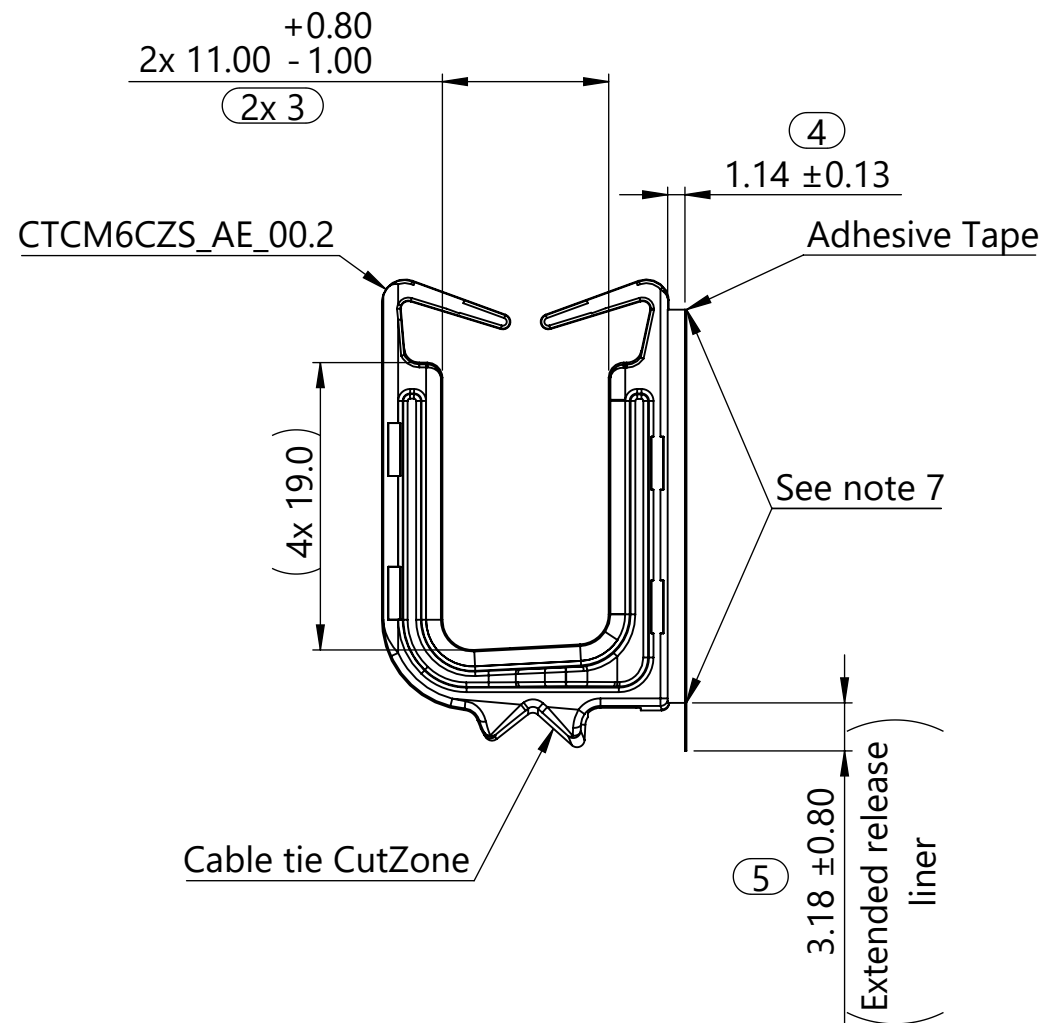
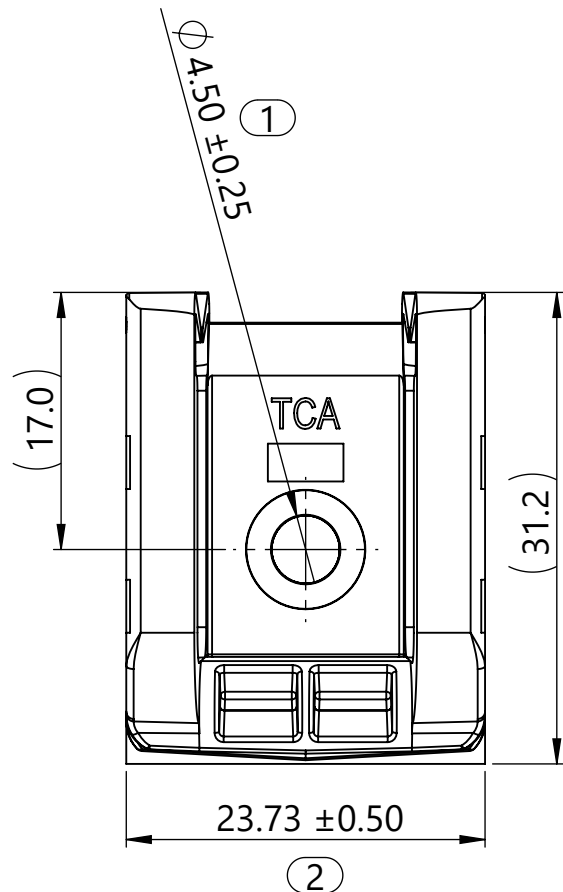





Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 0%
4. Maximum allowable flash to be: 0.25 mm
5. Maximum allowable mismatch to be: 0.10 mm
6. A dimension without an inspection report symbol  does not require inspection. It may be controlled on the individual component drawing.
 - a. Total number of inspections required: 7
 - b. Last number used: 7
 - c. Missing symbols: -
7. Tape may be flush or inside the mount edge
8. Tape may be flush or extend beyond the edge of the mount
9. Store product in its original packaging between 4°C to 38°C (40°F to 100°F) and 0-95% relative humidity, the optimum storage conditions are 22°C (72°F) and 50% relative humidity out of direct sunlight
10. Mounting screw size:
 - M4
 - #8 [0.164 in]
11. Accommodates cable tie series: T18 - T120
12. Accommodates 3/8in grip tie: GT.375

Part Description			CTCM11CZS_AE			Adhesive Tape		
			Drawing Number	Material	Color	Storage Conditions	Adhesive Material	Color
CTCM11CZA_AE-PA66HS-BK			24-1130-002-CSU_00.2	PA66HS	Black (BK)	See note 9	241-002-08 acrylic foam tape	Black (BK)
CTCM11CZA_AE-PA66HS-WH			24-1130-002-CSU_00.2	PA66HS	White (WH)	See note 9	241-002-08 acrylic foam tape	Black (BK)

Revision level			Revision Record			Drawn		Date (YYYY/MM/DD)	Title CTCM11CZA_AE 11 mm cradle with adhesive mount, retention arms, and CutZone		Scale 2:1		
Drawing	State	Part	ECN 312175			Spangler	2025/05/06	Approved			Date (YYYY/MM/DD)	Global Project Number 25-0578	
00.2	Design Release	-											
Changed		Date (YYYY/MM/DD)								Drawing-No 25-0578-102-CSU		Format A3	
Spangler		2025/05/06										Sheet 1/1	
Approved		Date (YYYY/MM/DD)											
Mann		2025/08/19											

Units				The copyright of this drawing is reserved by HellermannTyton.		All drawing revision are stored in CAD PDM database	
mm							