



PEM® PRETECT™ THREADED MASKING PLUGS

Re-engineered for ultimate thread protection -
reducing labor and increasing production throughput

PEM® PreTect™ thread masking plugs reduce labor and protect threads from paint and powder coating processes. PreTect™ thread masking plugs are available for standard type self-clinching nuts in a variety of thread sizes and materials.

Features include:


- Fasteners are shipped with plugs already in place.
- Plugs easily removed by end user with fine tip tool.
- Plugs can withstand 482° F/250° C temperatures.



[[LEARN MORE](#)]



Counterbore tooling required for installation of PEM® fasteners with PreTect™ thread masking plugs. For questions, e-mail techsupport@pemnet.com

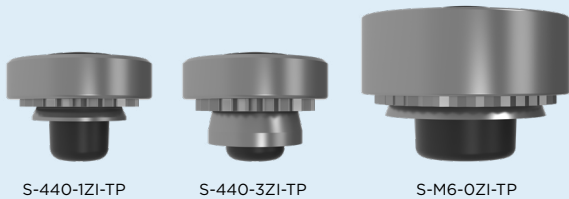

S-440-1ZI-TP


S-440-3ZI-TP

S-M6-0ZI-TP


Plugs are available for #4-40 to 3/8-16 and M2.5 to M8 standard type self-clinching nuts.

Contact techsupport@pemnet.com for installation tooling information and for plug options in other internally threaded fasteners.

EXAMPLE PART NUMBER

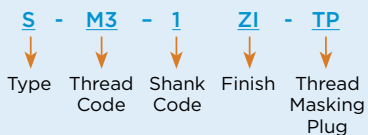

Add the suffix "TP" to PEM® part number to order fastener with pre-installed thread masking plug.

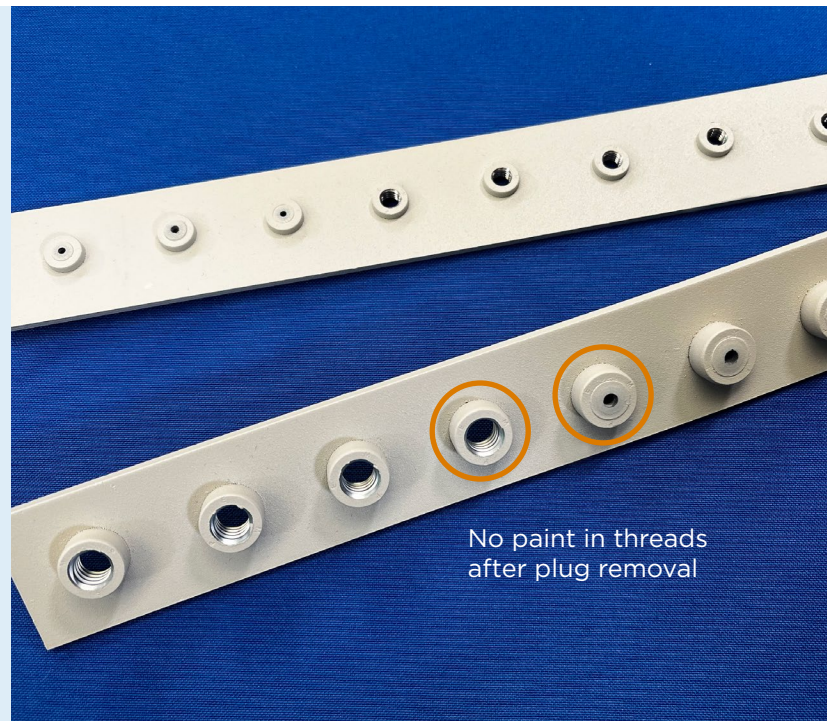

No paint in threads after plug removal

GLOBAL CONTACT INFORMATION

NORTH AMERICA

Danboro, Pennsylvania USA
info@pemnet.com
+1-215-766-8853
800-237-4736 (USA)

EUROPE

Galway, Ireland
europa@pemnet.com
+353-91-751714

ASIA/PACIFIC

Japan
eurotec@eurotec21.com
+042-798-7177

Singapore
singapore@pemnet.com
+65-6-745-0660

SHANGHAI, CHINA

china@pemnet.com
+86-21-5868-3688