



“Coined”  
edges prevent  
cable damage




- Robust “double-compression” design securely holds from (1) 12 gauge USE-2 to (2) 10 gauge PV-1000V solar wires.
- Also for use with other cables from .20” (5,1 mm) to .30” (7,6 mm) in diameter.
- Designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Generous lead in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 304 stainless steel.
- 316 stainless steel now available for marine and other harsh environments.
- SunRunner fits module frames up to .125” (3,2 mm) thick.
- **SunRunner EZ designed for thicker module frames** as well as racking – accommodates profiles up to .250” (6,4 mm) thick!
- 304 stainless steel not for use in a marine salt water environment. Contact Heyco for alternative materials.
- DFARS Compliant


## HEYClip™ SunRunner® Cable Clips

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (2) Wires	PART NO.		DESCRIPTION	FOOTPRINT HEIGHT A x B		OVERALL HEIGHT C	
Minimum	Maximum	304 Stainless	316 Stainless <small>NEW!</small>					in.	mm.	in.	mm.
.06	1,4	.13	3,2	.20” (5,1 mm)- .30” (7,6 mm) each cable	S6405	S6490	SunRunner® 100 Pack	.97 x .50	24,6 x 12,7	.39	9,9
					S6445	S6495	SunRunner® Bulk				

Double-Compression Design for panels up to .125” (3,2 mm) thick



SunRunner®  
(above)

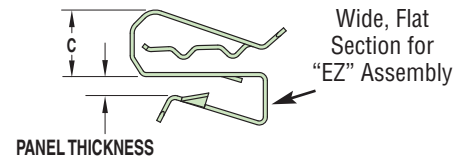

SunRunner® EZ  
(below)



SunRunner® EZ with (optional) SunBundler (page 1-11) looped through slot

## HEYClip™ SunRunner® EZ™ Cable Clip

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE Maximum (2) Wires	PART NO. 304 Stainless	DESCRIPTION	FOOTPRINT A x B		OVERALL HEIGHT C	
Minimum	Maximum	in.	mm.				in.	mm.	in.	mm.
.09	2,3	.25	6,4	.20” (5,1 mm)- .30” (7,6 mm) each cable	S6407	SunRunner® EZ 100 Pack	.97 x .50	24,6 x 12,7	.41	10,4
					S6447	SunRunner® EZ Bulk				

Double-Compression Design for panels up to .250” (6,4 mm) thick



Quick  
Specs

Material .025” thick 304 or 316 stainless steel  
 Certifications Certified by UL for Compliance with both Canadian and US Requirements under File E54523  
 Temperature Range -40°F (-40°C) to 572°F (300°C)