




■ **PRODUCT DATA:**

| Material: UL94 V2 Heat Stabilized Nylon, RMS-164, Conforms to MIL-M-20693/ASTM D-4066,<br>Eyelet: Aluminum, RMS-31, Anodized in accordance with MIL-A-8625 |             |                       |                            |               |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
|--|-------------|-----------------------|----------------------------|---------------|------------|------------|-------------|------------|-------------|-------------|-------------|---------------|------|------------|--|-------------|-------------|------------|------------|
| Color: Light Green   |             | Cable Bundle Dia. "D" | Recommended Mounting Screw | "E"           | "F"        | "P"        | "R"         | "T"        | "W"         | "X"         | "Y"         | Standard Pack | Fig. |            |  |             |             |            |            |
| Part No.   | MS Part No. |                       |                            |               |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-3-R3  | MS25281-R3  | 3/16 (4.8)            | #10 or M5                  | .485 (12.3)   | .250 (6.4) | .250 (6.4) | .062 (1.57) | .057 (1.4) | .503 (12.8) | .065 (1.7)  | .080 (2)    | 500           | 1    |            |  |             |             |            |            |
| NM-4-R4  | MS25281-R4  | 1/4 (6.4)             |                            | .510 (13)     |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-5-R5  | MS25281-R5  | 5/16 (7.9)            |                            | .546 (13.9)   |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-6-R6  | MS25281-R6  | 3/8 (9.5)             |                            | .578 (14.7)   |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-7-R7  | MS25281-R7  | 7/16 (11.1)           |                            | .608 (15.4)   |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-8-R8  | MS25281-R8  | 1/2 (12.7)            |                            | .639 (16.2)   |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-10-R10  | MS25281-R10 | 5/8 (15.9)            |                            | .706 (17.9)   |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-11-R11  | MS25281-R11 | 11/16 (17.5)          |                            | .785 (19.9)   |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-12-R12  | MS25281-R12 | 3/4 (19.1)            |                            | .816 (20.7)   |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-13-R13  | MS25281-R13 | 13/16 (20.6)          |                            | .827 (21)     |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-14-R14  | MS25281-R14 | 7/8 (22.2)            |                            | .878 (22.3)   |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-16-R16  | MS25281-R16 | 1 (25.4)              |                            | .941 (23.9)   |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-18-R18  | MS25281-R18 | 1-1/8 (28.6)          |                            | .983 (25)     |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-20-R20  | MS25281-R20 | 1-1/4 (31.75)         |                            | 1.066 (27.1)  |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-22-R22  | MS25281-R22 | 1-3/8 (34.9)          |                            | 1.110 (28.2)  |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-24-R24  | MS25281-R24 | 1-1/2 (38.1)          |                            | 1.170 (29.7)  |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-26-R26  | MS25281-R26 | 1-5/8 (41.3)          |                            | 1.250 (31.75) |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-28-R28  | MS25281-R28 | 1-3/4 (44.5)          |                            | 1.300 (33)    |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-3-F3  | MS25281-F3  | 3/16 (4.8)            |                            | .498 (12.6)   | .250 (6.4) | .250 (6.4) | N/A         | .040 (1)   | .500 (12.7) | .065 (1.65) | .065 (1.65) | 500           | 2    |            |  |             |             |            |            |
| NM-4-F4  | MS25281-F4  | 1/4 (6.4)             |                            | .529 (13.4)   |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-5-F5  | MS25281-F5  | 5/16 (7.9)            | .560 (14.2)                |               |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-6-F6  | MS25281-F6  | 3/8 (9.5)             | .592 (15)                  |               |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-7-F7  | MS25281-F7  | 7/16 (11.1)           | .623 (15.8)                |               |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-8-F8  | MS25281-F8  | 1/2 (12.7)            | .654 (16.6)                |               |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-10-F10  | MS25281-F10 | 5/8 (15.9)            | .783 (19.9)                |               |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
| NM-13-F13  | MS25281-F13 | 13/16 (20.6)          | .877 (22.3)                |               |            |            |             |            |             |             |             |               |      |            |  |             |             |            |            |
|  |             |                       |                            | .300 (7.6)    |            |            |             |            |             |             |             |               |      | .300 (7.6) |  | .073 (1.85) | .600 (15.2) | .075 (1.9) | .125 (3.2) |

■ **OTHER RICHCO AEROSPACE & MILITARY SOLUTIONS:**

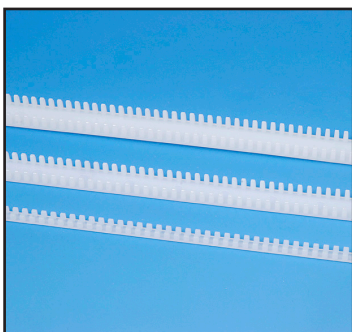

**MGS Series**

Complies with NASM21266




**WIT Series**

UL94 V2 Nylon 6/6  
Cable Ties  
QPL 23190 Approved  
MS3367-4/-1/-2 (-9;-0)



**GFA Series**

Meets NAS1368 Standard

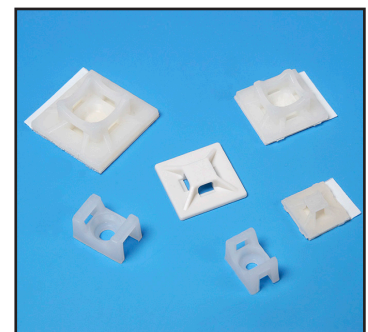

**FTH Series**

